


### PINE

(pictures for reference only, samples must be ordered separately)

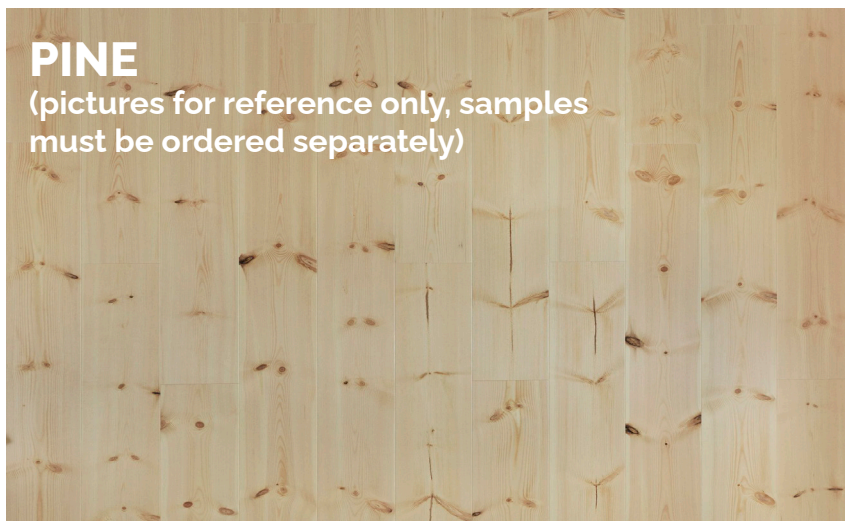

#### WOOD SPECIES

Pine wood is light brown to reddish brown in colour. The heartwood is clearly darker than the sapwood.

Brinell hardness ~ 1.3-1.8 HB

#### PRODUCT

Pine floors beautifully highlight the characteristic qualities of natural wood. Wood is an environmentally friendly and ecologically durable interior design material, which brings character, warmth and comfort to every room. A real wooden floor provides interior designers with timeless aesthetics and a long-term partnership in the most important place of your life – your home. Trends come and go, but the charm and value of genuine wooden floors never change.

#### DIMENSIONS (2.42 m<sup>2</sup> per package, 96.8 m<sup>2</sup> per pallet)

- Thickness: **14.5 mm**
- Width: **185 mm**
- Length: 2,180 mm, available length dimensions also include 2,080 mm, 2,000 mm and 1,818 mm (only one length per package)
- Surface layer: 3,5 mm
- Weight: 9.6 kg/m<sup>2</sup>

#### STRUCTURE

- Single-strip wooden floor
- 0.7 mm micro bevels on the long sides,
- 0.5 mm micro bevels on the short sides
- Three-layer cross-glued structure:
  - Surface layer 3.5 mm
  - Intermediate layer: domestic birch plywood, 9 mm
  - Base veneer: domestic spruce, 2 mm

3.5 mm  
9.0 mm  
2.0 mm



Standard products have a birch plywood structure

#### SURFACE TREATMENT OPTIONS

- UV-cured wax oil (also available untreated)
- Smooth, sanded surface

#### INSTALLATION OPTIONS

- Can be installed as either floating (underlay material required) or glued to the underlay (concrete or plywood).
- Locking tongue and groove WiseLock 5G
- The tongues and grooves are treated with a moisture-repellent wax to protect the seams.
- Suitable for installation on surfaces with underfloor heating.



#### QUALITY

- **FINNISH** quality – produced from start to finish in Finland, a Key Flag Symbol product
- Allergy Label – Timberwise products are the first and only products in their category to be awarded the Finnish Allergy, Skin and Asthma Federation's Allergy Label.
- PEFC – our timber comes from certified forests
- CE – our products fulfil the safety requirements of the applicable EU directives
- M1 – the best possible emission classification
- JAS2 – our adhesive joints meet the criteria for the most demanding industry standards
- JAS F\*\*\*\* – the highest and most stringent standard for formaldehyde emission testing, we use the formaldehyde-free EPI adhesive in our products





PINE

